


QLD MINI CRANES

NTC 48

QMC001 & QMC002

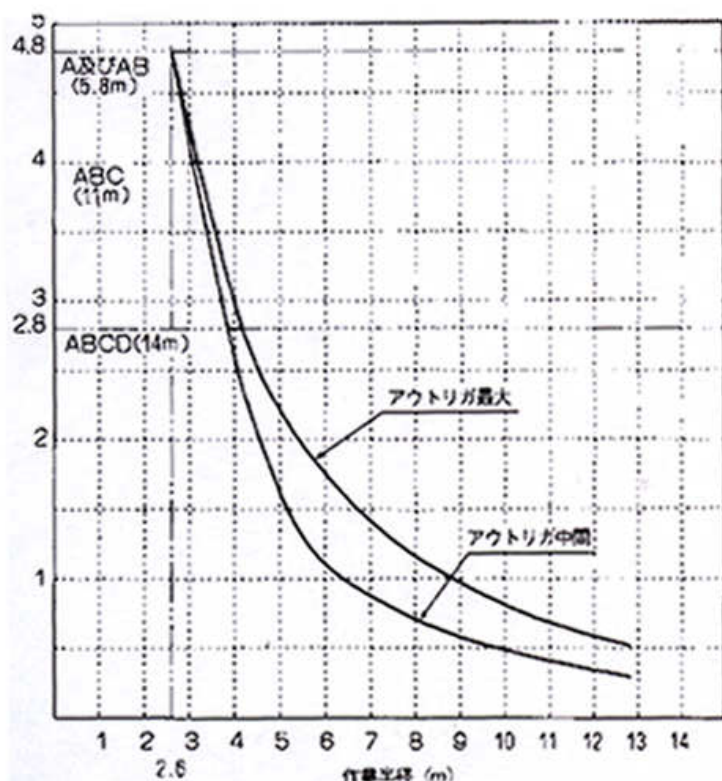

TYPE	NTC 48
Max. Lifting Capacity X Radius	4,800kg x 2.6m
Max. Operating Radius	12.8m
Max. Lifting Height	14.2m
Winch Rope Line Speed	51.8m/min (1 st layer)
Rope Size	Ø 10 x 100m
Boom Length	5-14m
Telescopic Boom	Pentagon box 4 stage
Travel Speed	1.6km/hr 1.5km/hr
Crawler	Rubber shoe
Engine Model	Isuzu 3LDI
Type	Water cooled, diesel
Displacement	1496cc
Output	31ps/2600rpm
Overall Width	1,950mm
Overall Height	2,650mm
Overall Length	5,625mm
Operating Weight	6,700kg

RATED LIFTING CAPACITY MODEL: NTC48				
O.R.	5M boom	8M boom	11M boom	14M boom
2.0M	4.80 4.80	4.80 4.80		
2.6M	4.80 4.80	4.80 4.80	4.00	
3.0M	4.25 4.12	4.25 4.25	4.00 4.00	2.80 2.80
3.5M	3.59 3.32	3.59 3.32	3.59 3.32	2.80 2.80
4.0M	3.20 2.86	2.98 2.58	2.98 2.58	2.80 2.58
4.5M		2.52 2.04	2.52 2.04	2.52 2.04
5.0M		2.20 1.62	2.20 1.62	2.20 1.62
5.5M		1.96 1.30	1.96 1.30	1.96 1.30
6.0M		1.75 1.10	1.75 1.10	1.75 1.10
7.0M		1.47 0.91	1.41 0.87	1.41 0.87
8.0M			1.16 0.70	1.16 0.70
9.0M			0.96 0.58	0.96 0.58
10.0M			0.83 0.50	0.80 0.48
11.0M				0.68 0.41
12.0M				0.58 0.34
12.8M				0.52 0.29

NTC48

